


■仔细观察电路板和电源线之间的引入和接出线路，将5V的线连接到电路板上针孔最多的位置，24V的线连接到靠近电路板边的位置，接错会导致电路板烧坏。

■小贴士：露出一点点焊锡的线，以确保接触良好。


■Observe the inputs and outputs between the circuit board and the power cords carefully. Attach the 5V wire to the socket on the side with lots of holes, and the 24V wire to the socket near the edge of the circuit board. Wrong connection will burn the circuit board.

■Expose a little bit of soldered wire to guarantee a good contact.

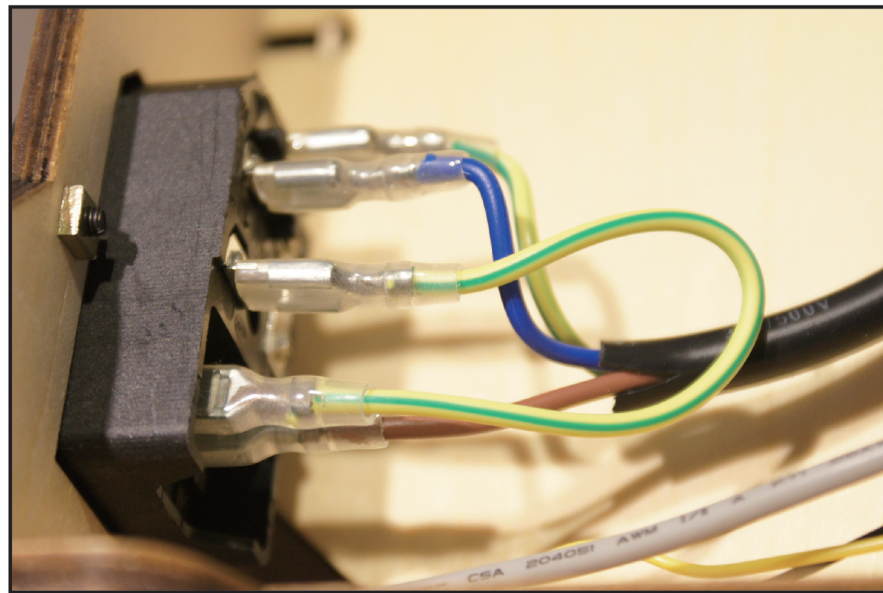

■三线的为220v电源进线接口，将电线直接从开关引出接入到电源。

■The three-core cable is used to input 220v power supply. Pull it from the switch and connect to the power supply directly.

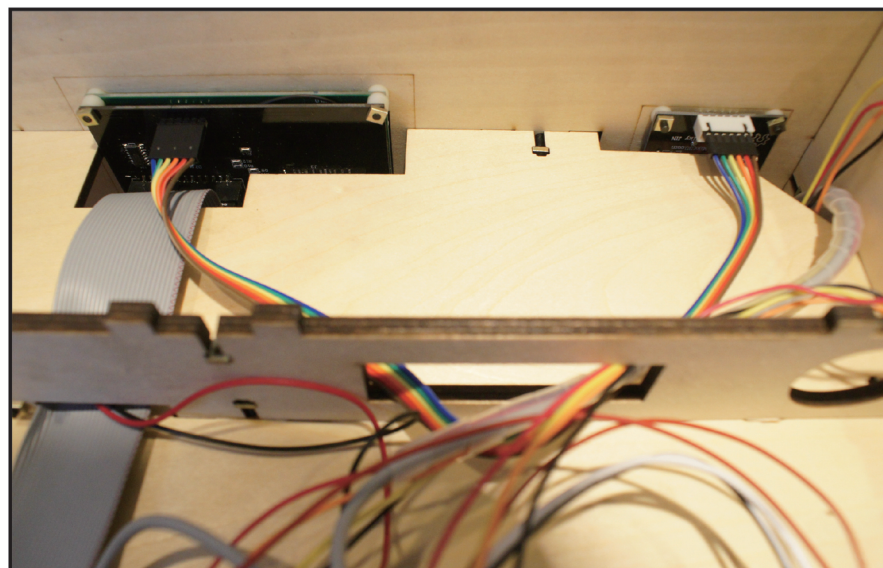

■按键、液晶屏的安装如图所示。将液晶的屏排线直接连接到主板，按键板上和液晶屏之间的线路为反向接法。如果连接按键板的针脚朝外，则连接液晶板的就朝内，针脚方向相同将导致按键板无效。

■The assembling of buttons and LCD panel is as shown in the picture. Attach the flat cable of the LCD panel directly to the motherboard. Connect the button control panel and the LCD panel by reverse connection. If the pin of the button control panel is outwards, the connected pin of the LCD panel should be inwards. If the two connected pins are in the same direction, the buttons will not work.

